


Информацията в този документ е заличена на основание чл. 37 от ЗОП

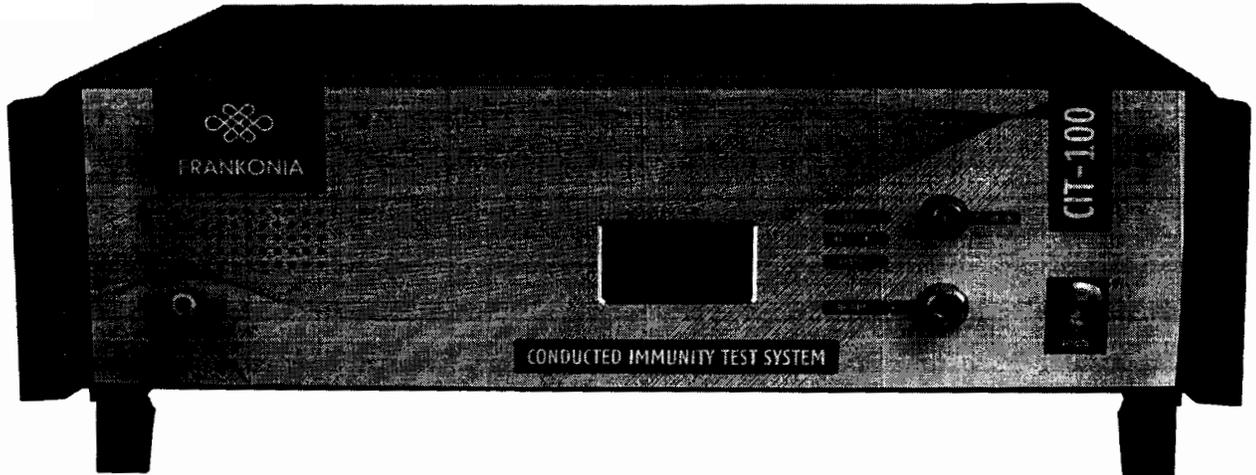

Description

The CIT-100 is a complete test system for conducted RF-immunity testing and BCI-testing acc. to IEC/EN 61000-4-6, ISO 11452-4, MIL-STD 461, CS114 and similar standards.

The system coconsists of a built-in

- Signal generator, 4kHz - 1.2 GHz
- RF-Power-Amplifier, max 4kHz - 400 MHz, 25 / 75 W
- 3-Channel RF-Power-Meter to measure the test level as well as forward & reverse power, 4kHz - 1.2 GHz
- Directional Coupler
- Comfortable control software

As a „stand-alone“ test system the CIT-100 is convincing by its easy and comfortable handling and the excellent cost-performance ratio.

We also offer the full range of coupling/decoupling networks (CDN's), EM-coupling clamp, BCI- and current clamps.

Special Features:

- Conducted RF immunity tests acc. to IEC/EN61000-4-6 and BCI tests acc. to ISO 11452-4 and MIL-STD 461, CS 114
- Signalgenerator, RF-power amplifier, RF-power meter and directional coupler in one 19"-case
- All built in instruments can also be used separately, via existing input / output connector. Hence, the Signal-generator and the RF-power-meter can also be used for radiated immunity tests acc. IEC/EN 61000-4-3. Furthermore an additional external RF-Power-amplifier could be connected to the CIT-100 for this purpose.
- Stand-alone operation possible with optional available netbook
- Control-software included
- Most important parameters are shown on an integrated display
- Automatic EUT-monitoring
- Operation via USB port of a PC or Notebook
- Complete range of CDNs and EM-clamps available

Информацията в този документ е заличена на основание чл. 37 от ЗОП

Technical specifications

Two switchable outputs (Only one can be used simultaneously)	2 x SMA
Frequency range	4 kHz to 1.2 GHz
Frequency resolution	1 Hz
Output level range	0 to -63 dBm
Output level resolution	0.1 dB
Harmonics	< 30 dBc
Spurious	< 45 dBc
Amplitude mod. (internal)	0 - 100%, resolution 1%
Amplitude mod. (external)	0-100%, max. Amplitude 1V=100%, BNC jack
Pulse modulation (internal)	5-95%, resolution 1%
Pulse modulation (external)	DC...1MHz, 3,3/5V CMOS/TTL, BNC jack
Connector	BNC jack
Frequency range	1 Hz to 100 kHz
Frequency resolution	0.1 Hz
Signal	Sine wave / square wave / triangular
Amplitude	0...1 V

Technical specifications

Connector	BNC jack
Frequency range	4 kHz to 1.2 GHz
Measuring range	-40 to +30 dBm
Connector	2 x SMA
Frequency range	4 kHz to 1.2 GHz
Measuring range	-40 to +33 dBm + directional coupler typ. 40 dB
Input voltage	0-10 V
Resolution	2.5 mV
Input impedance	100 k
Input signal	3.3/5V CMOS/TTL level
Detection Mode	Status or edge controlled
Temperature measurement	10 to 100 °C (1039-1385Ω) resolution < 1 °C (PT1000)
USB 2.0	USB-B
LAN, 100 Mbit	RJ45
GPIO (optional)	Centronics
Out	4 Bit Digital out, 5V CMOS/TTL
In	4 Bit Digital in, 5V CMOS/TTL
Closes at	R < 1 kΩ

Technical specifications	CI-100 / 25	CI-100 / 75 MIL	CI-100 / 75
Frequency range	100kHz-250MHz	(4) 10kHz-250 (400) MHz	100kHz-400MHz
Output Power:			
Nominal	25 W	75 W 10W from 4 kHz - 10 kHz min. 20 W from 250 MHz - 400 MHz	75 W
Linear @ 1dB compression	20 W	50 W	50 W
Gain	46dB nominal	51dB nominal	51dB nominal
Flatness		± 1.5 dB maximum	
Input power for rated input		1 mW / 0 dBm	
Input / output impedance		50 Ω	
Input VSWR		1.5:1 max	
Harmonic distortion	<- 20 dBc @ 20 W	<- 20 dBc @ 50 W	<- 20 dBc @ 50 W
Noise figure	typ. 5 dB	typ. 7 dB	typ. 7 dB
Spurious output		<- 75 dBc @ 10 W	

Информацията в този документ е заличена на основание чл. 37 от ЗОП

Internal RF-Power Amplifier

Several amplifier modules are available. Highest output power can be 75 W over the specified frequency range. The amplifier input can be accessed via the back panel of the CIT-100, so that the amplifier can also be used with any external generator. 25 W and 75 W amplifiers are available as standard.

Internal RF-Voltmeter

Accurate measurements of RF signals from -40 dBm up to +30 dBm are done by the internal 3-channel RF-voltmeter which can be accessed (for separate use) via a BNC connector. One channel is used to measure the test level and two channels to measure the forward and reverse power via the built-in directional coupler.

Internal RF-Signal Generator

As the internal generator generates its output signal without any internal mixing components, low harmonics and spurious frequencies are assured.

Amplitude Modulation

Frequencies generated by the generator can also be modulated with a LF signal. Modulation frequencies may vary from 1 Hz up to 100 kHz, modulation levels are available from 0 % to 100 %.

User defined signals

External signals (e.g. EUT-fail or external instruments) can be connected and monitored using the application software.

The CIT-100 is a PC-controlled test equipment. It can be operated by any commercial IBM compatible PC (Microsoft® Windows software) via USB port. All settings of the equipment, e.g. start frequency, stop frequency, step width, test voltage etc. are made by means of the control software which is also included in the delivery. The three functional units RF-signal generator, RF-power amplifier and RF-voltmeter are set automatically by the software, depending on the pre-set test parameters.

Each component, however, may also be called and operated as separate measuring and testing equipment. This means: using the CIT-100 as testing system, you have three full, additional "single units" at your disposal, for which separate inputs and outputs are available as BNC connections. Due to the computer-aided control of the CIT-100, any modifications which may become necessary, for example, due to the revision of standards, may be performed without problems and without having to manipulate the hardware of the equipment.

Type	CIT-100 / 25	CIT-100 / 75 MIL	CIT-100 / 75
Signalgenerator	4 kHz to 1.2 GHz		
RF-Power-Amplifier	25 W 100 kHz - 250 MHz	75 W from 10kHz - 250MHz 10 W from 4 kHz - 100 kHz min. 20 W from 250 MHz - 400 MHz	75 W 100 kHz - 400 MHz
RF-Power-Meter (3-channel)	4 kHz to 1.2 GHz		
Directional coupler	4 kHz to 1.2 GHz		

MP-50


The Current Monitoring probes may be used whenever RF current measurements are required. Current measurements are made by placing a current carrying conductor within the "sensing" window of the probe and measuring the probe's output voltage with an RF detector. Calibration of the probe permits the conversion of the voltages measured to current. Current measurements can be made over the frequency range shown in the transfer impedance curve furnished with each probe. There is virtually no loading of the circuit and the technique permits normal operation of the device under test during measurements. The MP-50 can be used for the procedure for clamp injection when the common-mode impedance requirements cannot be met given in chapter 7.4 of IEC/EN 61000-4-6 „Immunity to conducted disturbances, induced by radio frequency fields". The MP-50 can also be used as current monitor for BCI testing as per ISO11452-4, RTCA/DO-160 section 20, MIL-STD-461 and various automotive standards.

Features

As required in IEC/EN 61000-4-6

Suitable for BCI testing per ISO11452-4, RTCA/DO-160 section 20, MIL-STD 461 CS 114 and various automotive standards

Individual calibration data with each probe

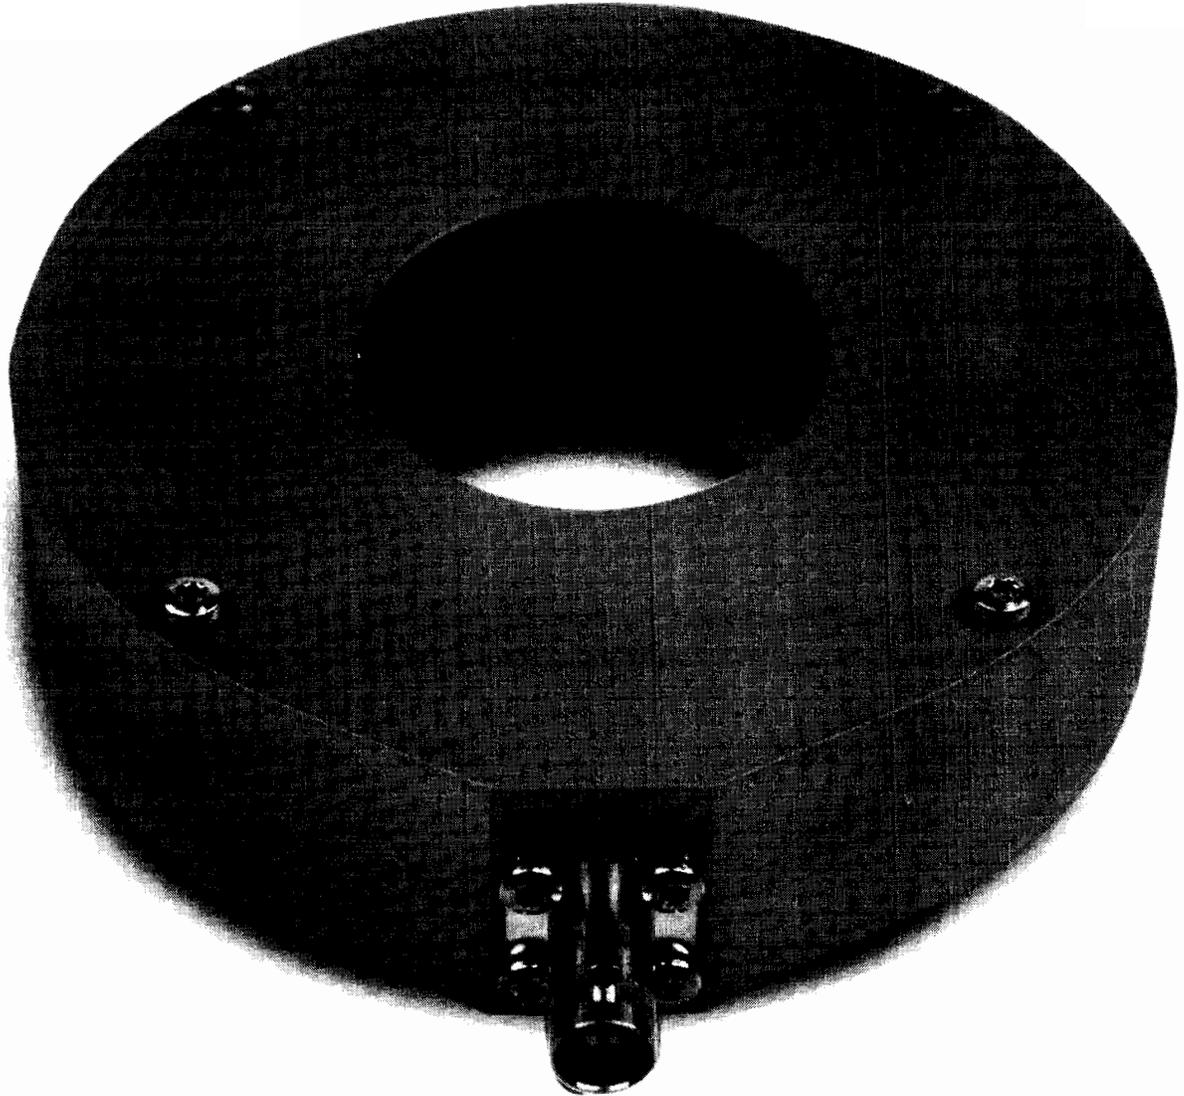

Technical Specifications	MP-50
Frequency range	10 kHz – 400 MHz
Insertion impedance	< 2,5 Ohm
Cable diameter	< 46 mm
Signal output	BNC sc
Max signal current (10	1A

kHz–400 MHz)

Dimensions

Outer diameter 115 mm
Thickness 30mm
Overall length 136mm

Weight

0,55 kg

